


MOLEX Micro-Fit 3.0™ Connectors

This page of product is RoHS compliant.

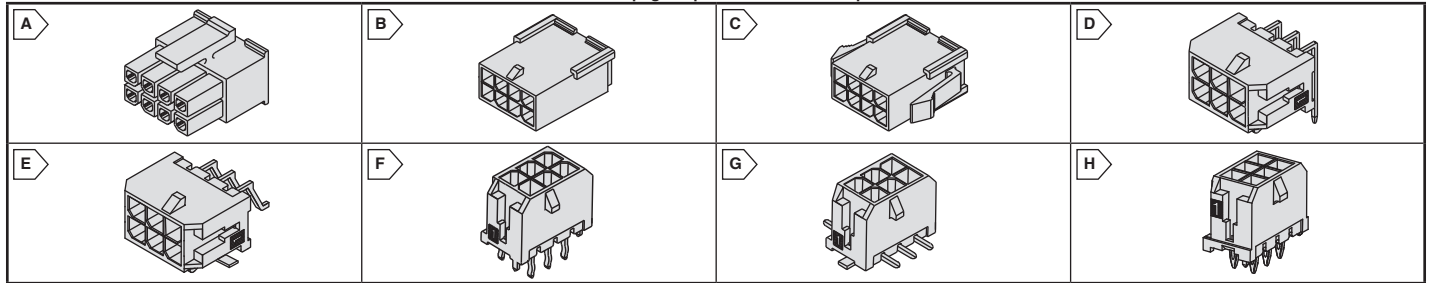

For quantities greater than listed, call for quote.

DUAL ROW CONNECTORS

Specifications:

- 3.00mm Pitch, Fully isolated contacts, Full polarization, Positive locks, Surface Mount Compatible, Up to 5.0A per circuit, 250V AC rating, UL 94V-0, CSA TUV approved



For quantities greater than listed, call for quote.

Table with columns: MOUSER STOCK NO., Molex Part No., Fig., No. of Circuits, Plating, Price Each (1, 10, 100). Rows include Crimp Housing Receptacles, Crimp Housing Plugs (Free Hanging), Crimp Housing Plugs (Panel Mount), and Right Angle Headers (Snap-in-Peg Locks).

Table with columns: MOUSER STOCK NO., Molex Part No., Fig., No. of Circuits, Plating, Price Each (1, 10, 100). Rows include Right Angle Headers (SMT - Solder Tabs), Right Angle Headers (Thru-hole), Vertical Headers (Thru-hole - Offset Terminal Retention), and Vertical Headers (SMT - Solder Tabs).

Rectangular Connectors Molex

MICRO-FIT CPI™ (COMPLIANT PIN INTERFACE)

For quantities greater than listed, call for quote.

Table with columns: MOUSER STOCK NO., Molex Part No., Fig., No. of Circuits, Plating, Price Each (1, 10, 100). Rows include Vertical Headers - Press-Fit - Solderless.